

STREAMO

MARINE FLOORINGS FOR SHIP INTERIORS



NEW
新系列

船用内装地板

MARINER / MARINER SD

Gerflor®

STREAMO MARINER SD



2 m



605x608mm




100 % recyclable



0575

STREAMO MARINER SD

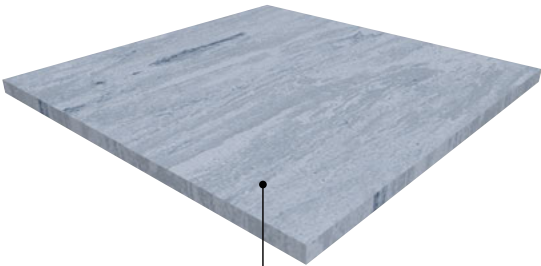

Compacted, calendered floorcovering
致密压延型地板

- Dissipative, antistatic homogeneous vinyl flooring
静电耗散型抗静电地板
- Especially suited for technical areas
特别适用于技术区域
- Directional design available in 6 colours
6种方向性花纹设计



WR: 05392014

SD 0002 Platinum



WR: 05392016

SD 0013 Pewter



WR: 05391007

SD 0112 Storm



WR: 05850054

SD 0306 Green



WR: 05392015

SD 0005 Steel



WR: 05392005

SD 0003 Ivory

STREAMO MARINER




easycare™

♻️ 100 % recyclable




STREAMO MARINER

Easycare™
Special maintenance treatment
Easycare™ 特殊维护处理

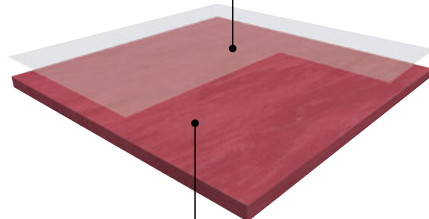

Compacted,
calendered
floorcovering
致密压延型地板

- Flexible homogeneous multipurpose vinyl flooring
弹性多功能地板
- Directional design available in 21 colours
21种方向性花纹设计
- Easycare™ Special maintenance treatment: No wax for life
Easycare™ 特殊维护处理，终生无需打蜡
- Matt finish surface
哑光表面
- Easy to install and weld for maximum hygiene and watertightness
易于安装，可焊接确保最大程度的洁净和防水性

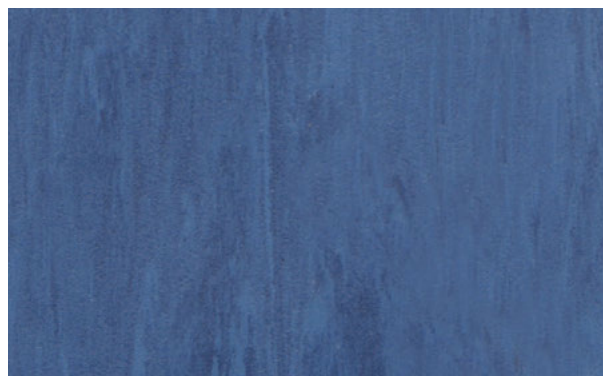


0019 Blue

WR: 05392011




0109 Sun

WR: 05392001

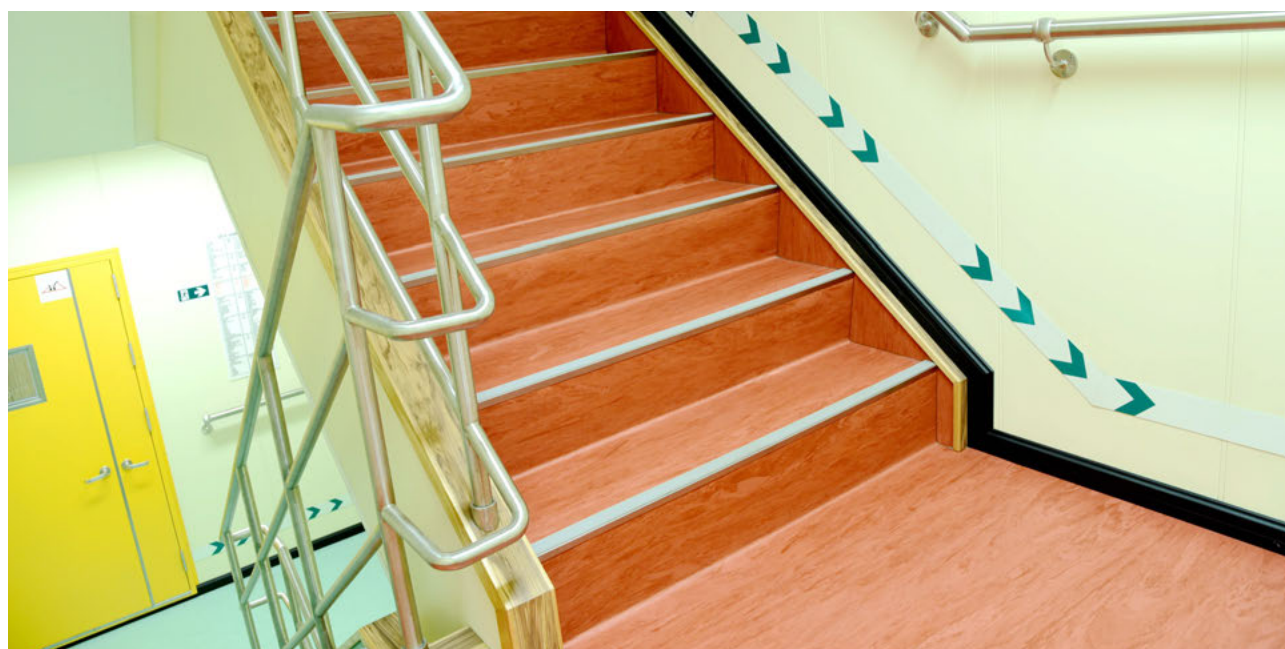

STREAMO MARINER



easy**care**™

♻️ 100 % recyclable



easy**care**™

Special maintenance treatment 特殊维护处理新技术

EASYCARE™, our brand special maintenance treatment, is our latest innovation in special maintenance treatment.

EASYCARE™, 洁弗乐全新一代特殊维护处理技术

- Good resistance to chemicals and to scuffing
耐化学物质和刮擦
- Improved resistance to micro-scratches and staining
提高了对微划痕和染色的抵抗力
- Easy to clean and maintain
易于清洁和维护
- No wax for life
终生无需打蜡




WR: 05392012

0007 Crocus



WR: 05392022

0032 Rosewood

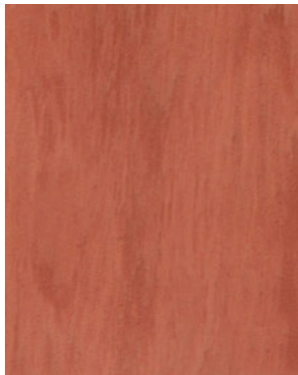

WR: 05392002

0018 Terra



WR: 05392003

0017 Red



WR: 05392028

2060 Iced Pale Blue



WR: 05392023

0028 Denim



WR: 05392010

0010 Azure

STREAMO MARINER



easyCare™

100 % recyclable



0575




WR: 05392004

0103 White



WR: 05392005

0016 Sand

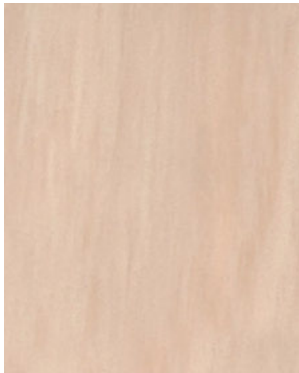

WR: 05392006

0003 Ivory



WR: 05392007

0006 Honey




WR: 05392018

0012 Mint



WR: 05392031

0029 Green Apple

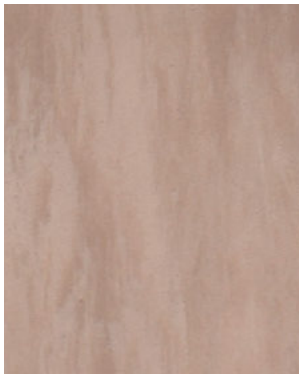

WR: 05392008

0014 Brown



WR: 05392021

2059 Camel



WR: 05392014

0002 Platinum



WR: 05392015

0005 Steel



WR: 05392016

0013 Pewter



WR: 05392017

0102 Black



STREAMO MARINER / MARINER SD

STREAMO MARINER

STREAMO MARINER SD



For medium to heavy duty traffic areas
适合中等和高人流量的区域



Ease of maintenance no immediate waxing
after installation, except in heavy traffic areas.
易于维护保养, 安装后无需立即打蜡,
除非是高人流量的区域



Dissipative, antistatic homogeneous floorcovering, for
technical areas.
静电耗散型同透地板, 适用于多个技术领域。

INSTALLATION 安装

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. 应按照 Gerflor® 技术部门提供的按照标准及当地标准进行安装。

MAINTENANCE 维护

Maintenance should be carried out regularly to retain the appearance and durability of the floor.
定期进行维护以保持外观整洁和耐用性。

Further installation and maintenance instructions are available upon request.
可根据要求提供更多安装和维护说明。

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.
橡胶会在乙烯基地板上留下无法擦拭的污点: 请勿在 PVC 地板上使用橡胶脚垫, 用PVC或聚酰胺(尼龙)材质代替家具橡胶脚垫。

			STREAMO MARINER	STREAMO MARINER SD	
DESCRIPTION 规格					
Total thickness 总厚度		EN ISO 24346	mm	2.0	2.0
Weight 重量		EN ISO 23997	g/m²	3300	3300
Width/Length of sheet 卷宽/卷长		EN ISO 24341	cm/lm	200/20	200/20
Tile size 块材尺寸		EN ISO 24342	cm	-	60.8 x60.8 ⁽¹⁾
Number of tiles per package 块材数量/每箱		-	-	-	20
CLASSIFICATION 类别					
Norm / Product specification 产品规范		-	-	EN ISO 10581	EN ISO 10581
Fire rating 防火等级	IMO认证	-	MSC 307(88) Part 5	MSC 307 (88) Part 5	
			MSC 307(88) Part 2	MSC 307 (88) Part 2	
	Maritime Approvals 海事认证	-	MED	MED	
			US Coast Guard	US Coast Guard	
			Transport Canada	Transport Canada	
			SOLAS 74	SOLAS 74	
Static electrical propensity 抗静电性		EN 1815	KV	≤2	≤ 2
Electrical resistance 电阻性能 ⁽²⁾		EN 1081	Ω	-	10 ⁶ ≤ R ≤ 10 ⁸
PERFORMANCES 性能					
Wet slip resistance 防湿滑性		DIN EN 16165 Annex B	class	R9	R9
Type binder content 粘合物分级		EN ISO 10581	type	II	II
Abrasion resistance 耐磨性		EN 660-2	mm3	≤7.5	-
Abrasion group 耐磨等级		EN 649	group	M	-
Dimensional stability 尺寸稳定性		EN ISO 23999	%	≤ 0.4	Sheet 卷材 ≤ 0.4 / Tiles 块材 ≤ 0.25
Residual indentation 残余凹陷性		EN ISO 24343-1	mm	≤ 0.1	≤ 0.1
Thermal conductivity 热传导性		EN ISO 10456	W/(m.K)	0.25	0.25
Colour fastness 颜色稳定性		EN ISO 105 - B02	degree	≥ 6	≥ 6
Chemical products resistance 抗化学性		EN ISO 26987	-	OK	OK
Anti-bacterial and fungicidal 抗菌防霉性能		-	-	OK	-
Special maintenance treatment 特殊维护处理		-	-	EASYCARE™	-
TVOC after 28 days 28天后TVOC ⁽³⁾ 排放量		ISO 16000 - 6	µg/m³	< 10	< 10

⁽¹⁾Products available in tiles for a minimum quantity order of 7.4 Sqm 产品最小起订量为7.4平方米

⁽²⁾Vertical resistance, measured before installation 垂直电阻, 安装前进行测试

⁽³⁾TVOC:挥发性有机化合物总排放量



0575



MAR 03-31-2024 Version
Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.
Gerflor® 一直致力于产品和技术的不更新, 我们保留对产品设计的更新且恕不另行通知的权利。

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Skirtings
& Profiles



Entrance Mat



IMO
adhesive

Gerflor 洁弗乐™

GERFLOR CHINA

SHANGHAI BRANCH 上海分公司 Tel. / 电话: +86-21-63578818
streamobygerflor.com streamobygerflor.cn