



STREAMO CLIPPER RT

- Rubber studded tile, complying with IMO regulations
- Adapted for all marine installations where rubber is requested (Technical areas, military vessels, workboats, ...)
- Easy to install
- Optimized thickness for a lighter weight
- 5 colors which can be easily combined to create pleasant interiors




0002 Black

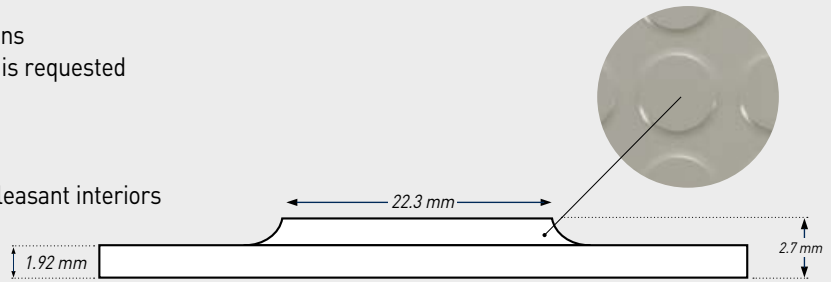

0001 Dark Grey



0003 Medium Grey



0005 Brick



0004 Dark Blue

DESCRIPTION / DESCRIPTION / BESCHREIBUNG / DESCRIPCIÓN / DESCRICÃO / DESCRIZIONE			
Total thickness / <i>Epaisseur totale</i> / Gesamtdicke / <i>Espesor total</i> / <i>Espessura total</i> / <i>Spessore totale</i>	ISO 24346:2012	mm	Mean value : 2,7 +/- 0,20 mm
Weight / <i>Poids</i> / Gewicht / <i>Peso</i> / <i>Peso</i> / <i>Peso</i>	ISO 23997:2012	g/m ²	3950 +/-10%
Tile size / <i>Format dalles</i> / Format Fliesen / <i>Dimensiones de las losetas</i> / <i>Dimensões dos mosaicos</i> / <i>Dimensione delle piastre</i>	ISO 24342:2012	mm	452 x 452
Number of tiles per package / <i>Nombre de dalles par boîte</i> / Fliesenanzahl pro Karton / <i>Cantidad de losetas/caja</i> / <i>Quantidade dos mosaicos/caixa</i> / <i>N° piastre per confezione</i>	-	-	25
Sqm/Box / <i>m²/boîte</i> / Qm pro Karton / <i>m²/Bulto</i> / <i>m²/Caixa</i> / <i>m²/confezione</i>	-	-	5,11
Packages per pallet / <i>Nombre de boîte par palette</i> / Karton pro Palette / <i>Cantidad de caja/paleta</i> / <i>Quantidade de caixas/paleta</i> / <i>N° confezione per pedana</i>	-	-	40
CLASSIFICATION / CLASSIFICATION / KLASSIFIZIERUNG / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI			
Fire rating / <i>Classement feu</i> / Brandverhalten / <i>Fuego</i> / <i>Fogo</i> / <i>Reazione al fuoco</i>	IMO Resolution	-	MSC 307(88) Part 5 MSC 307(88) Part 2
	Maritime Approvals	-	Marine Equipment Directive
		-	US Coast Guard
		-	Transport Canada
		-	SOLAS 74
Static electrical propensity / <i>Potentiel de charge</i> / Begehaufladung / <i>Comportamiento electrostático</i> / <i>Comportamento electrostatico</i> / <i>Potenziale di carica</i>	EN 1815	kV	< 2 (antistatic)
PERFORMANCE / PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE			
Wet Slip resistance / <i>Anti-glissance à l'humide</i> / Rutschverhalten bei Nässe / <i>Resistencia de deslizamiento en mojado</i> / <i>Antideslizamento condições no molhado</i> / <i>Indice di antiscivolosità con superficie bagnata</i>	EN 13893	class	≥ 0,30 (DS)
Hardness / <i>Dureté</i> / Härte / <i>Durezza</i> / <i>Durezza</i> / <i>Durezza</i>	ISO 7619:2010	shore A	≥ 70
Dimensional stability / <i>Stabilité dimensionnelle</i> / Maßstabilität / <i>Estabilidad dimensional</i> / <i>Estabilidade dimensional</i> / <i>Stabilità dimensionale</i>	ISO 23999:2012	%	± 0,40
Residual indentation / <i>Poinçonnement statique rémanent</i> / Resteindruck / <i>Punzonamiento</i> / <i>Punçoamento</i> / <i>Impronta</i>	ISO 24343-1:2007	mm	≤ 0,25
Cigarette burn / <i>Brûlure de cigarette</i> / Zigarettenglut / <i>Quemadura de cigarrillo</i> / <i>Queimadura de cigarro</i> / <i>Bruciatura di sigaretta</i>	EN 1399:1997	Rating	met. A ≥ 4 met. B ≥ 3
Tear Strength / <i>Résistance au déchirement</i> / Weiterreißwiderstand / <i>Resistencia al desgarro</i> / <i>Resistência ao rasgo</i> / <i>Resistenza alla lacerazione</i>	ISO 34-1:2004 Met B	N/mm	≥ 20
Flexibility / <i>Flexibilité</i> / Biegsamkeit / <i>Flexibilidad</i> / <i>Flexibilidade</i> / <i>Flessibilità</i>	EN ISO 24344 Met. A	-	No cracks
Colour fastness / <i>Solidité lumière</i> / Lichtechtheit / <i>Resistencia a la luz</i> / <i>Estabilidade das cores</i> / <i>Solidità alla luce</i>	ISO 105-B02:1999	Degree	> 6 Blue Scale